

ADLS-200 series

200W Enclosed Type Switching Power Supply



■ Features:

- Constant voltage design
- European AC input
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- Compact size
- Low price



ELECTRICAL SPECIFICATION

MODEL	ADLS-200-12	ADLS-200-24
OUTPUT		
<i>Rated Voltage</i>	12V	24V
<i>Rated Current</i>	17A	8.33A
<i>Rated Power</i>	204W	
<i>Line Regulation</i>	± 1%	
<i>Load Regulation</i>	± 2%	
<i>Ripple & Noise (max.) [2]</i>	2.5 V _{p-p}	
<i>Setup, Rise Time [4]</i>	1500ms, 10ms / 230VAC at full load	
<i>Hold up Time</i>	20ms / 230VAC at full load	
INPUT		
<i>Voltage Range</i>	180 ÷ 264VAC	
<i>Frequency Range</i>	47 ÷ 63Hz	
<i>Efficiency (typ.)</i>	85%	
<i>AC Current (typ.)</i>	2A / 230VAC	
PROTECTIONS		
<i>Overload</i>	Range: 110 ÷ 150% of rated current	
	Type: hiccup mode, auto-recovery.	
<i>Over voltage</i>	Range: 110 ÷ 170% of rated voltage	
	Type: hiccup mode, auto-recovery.	
<i>Short Circuit</i>	Type: hiccup mode, auto-recovery.	
WORKING ENVIRONMENT		
<i>Working Temperature</i>	-20°C ÷ 50°C	
<i>Working Humidity</i>	20 ÷ 90% RH non-condensing	
<i>Storage Temperature and Humidity</i>	-40°C ÷ 80°C, 10 ÷ 95% RH non-condensing	

ADLS-200 series

200W Enclosed Type Switching Power Supply



SAFETY AND EMC REGULATIONS

Safety Standards	Compliance to EN61347-1, EN61347-2-13
Withstand Voltage	I-P/O-P: 1.5kVAC; I-P/GND: 1.5kVAC; O-P/GND: 0.5kVAC
EMC Emission	Compliance to EN55015
EMC Immunity	Compliance to EN61547
Harmonic Current	Compliance to EN61000-3-3; EN61000-3-2

OTHERS


Lifetime	12 000Hrs for input 230VAC, 20°C ambient temperature, full load
Dimensions	223 x 68 x 40mm (L x W x H)
Weight and Packing	0.5kg; 40pcs./ctn; ctn weight and dimensions: 22.5kg; 46 x 39.3 x 27cm

EAN code



1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μF i 47μF parallel capacitor.
3. Tolerance includes set up tolerance, line regulation and load regulation.
4. Setup and rise time is measured from 0 to 90% rated output voltage.
5. Power supply is considered as component not indented to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-quality to comply with EMC Directives.


MECHANICAL SPECIFICATION

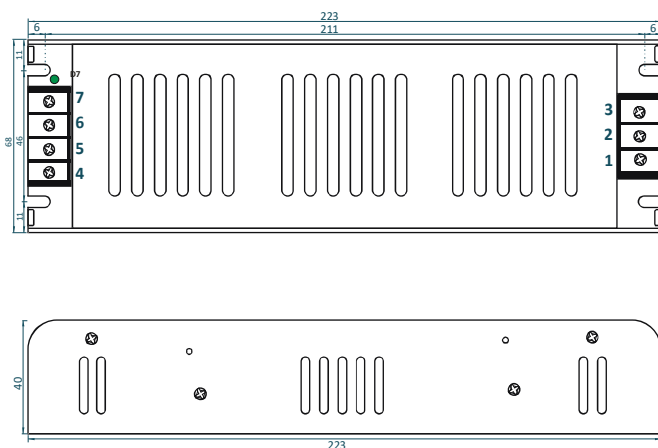

TERMINAL PIN NO. ASSIGNMENT

PIN No.	Assignment	PIN No.	Assignment
1	Frame Ground: GND	4,6	Output: -V
2	Input: AC/L	7,8	Output: +V
3	Input: AC/N	D7	Power On indicator

DERATING CURVE



EU DECLARATION OF CONFORMITY

For the following equipment:

Part No.:	ADLS-200-X (X = 12, 24)
Batch No.:	J118Axxxxx

Is herewith confirmed to comply with the requirements set out in the Council Directive, the following standards were applied:

ROHS Directive 2011/65/EU

Low Voltage Directive 2014/35/UE:

Standard	Description
EN 61347-1:2015	Lamp controlgear - General and safety requirements.
EN 61347-2-13:2014	Lamp controlgear - Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules

Electromagnetic Compatibility Directive 2014/30/UE:

Standard	Description
EN55015:2013 + A1:2015	Conducted emission / Radiated emission
EN61000-3-2:2014	Harmonic current.
EN61000-3-3:2013	Voltage flicker.
EN61547:2009	Electro-magnetic susceptibility.

Power supply is considered as component of final equipment not intended to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-qualified to comply with EMC and LVD Directives.

MPL POWER ELEKTRO Sp. z o.o.
44-119 Gliwice, ul. Wschodnia 40
NIP 631-24-57-646 REGON 240105601

Company stamp

KIEROWNIK
Dział techniczny

Łukasz Jaromin
Person signature and stamp