

MCHQ150V-GE series

150W Constant Voltage LED Switching Power Supply



■ Features:

- Constant voltage design
- European AC input range (max. 305VAC)
- Built-in active PFC function
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- High surge protection: 4kV – differential mode, 6kV – common mode
- IP67 protection class
- Suitable for dry, humid and rainy environment



CONSTANT VOLTAGE **SELV IP67**         

ELECTRICAL SPECIFICATION

MODEL	MCHQ150V12-GE			MCHQ150V24-GE			
OUTPUT							
<i>RATED VOLTAGE</i>	12V			24V			
<i>RATED CURRENT</i>	12.5A			6.25A			
<i>RATED POWER</i>	150W			150W			
<i>LINE REGULATION</i>	± 1%			± 1%			
<i>LOAD REGULATION</i>	± 1%			± 1%			
<i>VOLTAGE RIPPLE (PK-PK)</i>	± 2%			± 2%			
<i>SETUP, RISE TIME</i>	100ms, 300ms / 230Vac			100ms, 300ms / 230Vac			
INPUT							
<i>VOLTAGE RANGE</i>	180 ÷ 305Vac (refer to Derating Curve)						
<i>FREQUENCY RANGE</i>	47 ÷ 63Hz						
<i>POWER FACTOR (TYP.)</i>	PF > 0.98 / 230VAC at full load (refer to PF curve)						
<i>THD (MAX.)</i>	10% / 230VAC at full load (refer to THD curve)						
<i>EFFICIENCY (TYP.)</i>	92%			93.5%			
<i>AC CURRENT (MAX.)</i>	1.0A/230VAC						
<i>INRUSH CURRENT (MAX.)</i>	65A / 230VAC; T _{WIDTH} = 560μs						
<i>MAX. NO. OF PSU ON CIRCUIT BREAKER</i>		B10	B16	C10	C16	D10	D16
	12V	5	8	10	8	12	17
	24V	5	8	11	9	13	18
<i>LEAKAGE CURRENT (MAX.)</i>	0.7mA / 230VAC at full load						
<i>NO LOAD POWER CONSUMPTION (MAX.)</i>	0.5W / 230VAC						

MCHQ150V-GE series

150W Constant Voltage LED Switching Power Supply



PROTECTIONS

OVER LOAD	Range: 110 ÷ 170% rated load
	Type: hiccup mode. Recovers automatically after fault condition is removed.
SHORT CIRCUIT	Type: hiccup mode. Recovers automatically after fault condition is removed.
OVER VOLTAGE	Range: 150% rated voltage
	Type: shut down output voltage. Re-power on to recovery.
OVER TEMPERATURE	110°C
	Type: shut down output voltage. Re-power on to recovery.

WORKING ENVIRONMENT

WORKING TEMPERATURE	-40°C ÷ +55°C; tc=90°C (refer to derating curve)
WORKING HUMIDITY	10 ÷ 90% RH non-condensing
STORAGE TEMPERATURE AND HUMIDITY	-40°C ÷ 85°C, 10 ÷ 90% RH non-condensing
Tc	tc=90°C / tc=75°C for 5 years warranty

SAFETY and EMC STANDARDS

SAFETY STANDARDS	Compliance to EN61347-1, EN61347-2-13, EN 62493
EMC EMISSION	Compliance to EN55015
EMC IMMUNITY	Compliance to EN61547
HARMONIC CURRENT	Compliance to EN61000-3-2 class C, EN61000-3-3
OTHER REGULATIONS	Compliance to Commission Regulation (EU) 2019/2020
WITHSTAND VOLTAGE	IN/OUT: 3200VAC / 5mA, 60s
	IN/GND: 1600VAC / 5mA, 60s
	OUT/GND: 1000VAC / 5mA, 60s
INSULATION RESISTANCE	IN/OUT: ≥ 10MΩ / 500VDC
GROUNDING RESISTANCE	≤ 0.1Ω / 25A, 1min
IP PROTECTION CLASS	IP67

MCHQ150V-GE series

150W Constant Voltage LED Switching Power Supply



OTHERS

MTBF	200 000 hours / 25°C, full load, according to MIL-HDBK-217F
LIFETIME	55 000 hours / 230VAC, full load, $t_c=75^{\circ}\text{C}$
DIMENSIONS	193.6 x 62.5 x 38mm (L x W x H)
WEIGHT AND PACKING	0.74kg ; 15pcs./ctn; ctn dimensions: 28.5 x 23.5 x 25.5cm
PRIMARY CABLE	H05RN-F 105°C 3Gx1.0mm ² , length = 300 ± 30mm
SECONDARY CABLE	12V: SJTW, 2*16AWG / 2*1.31mm ² , 105°C, length = 300 ± 30mm
	24V: SJTW, 2*16AWG / 2*1.31mm ² , 105°C, length = 300 ± 30mm

EAN Code



5 902135 151815



5 902135 151822

1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.

2. Power supply is considered as component not intended to apply by end-user. Power supply meets safety and EMC standards however the final equipment with power supply must be re-qualified to comply with EMC Directives.

MECHANICAL SPECIFICATION

INPUT


H05RN-F 105°C 3Gx1.0mm²
length = 300mm ± 30mm

OUTPUT

12V: SJTW, 2*16AWG / 2*1.31mm², 105°C
24V: SJTW, 2*16AWG / 2*1.31mm², 105°C
length = 300mm ± 30mm

AC/L(brown)
AC/N(blue)
GND(yellow-green)

V+ (white)
V- (black)

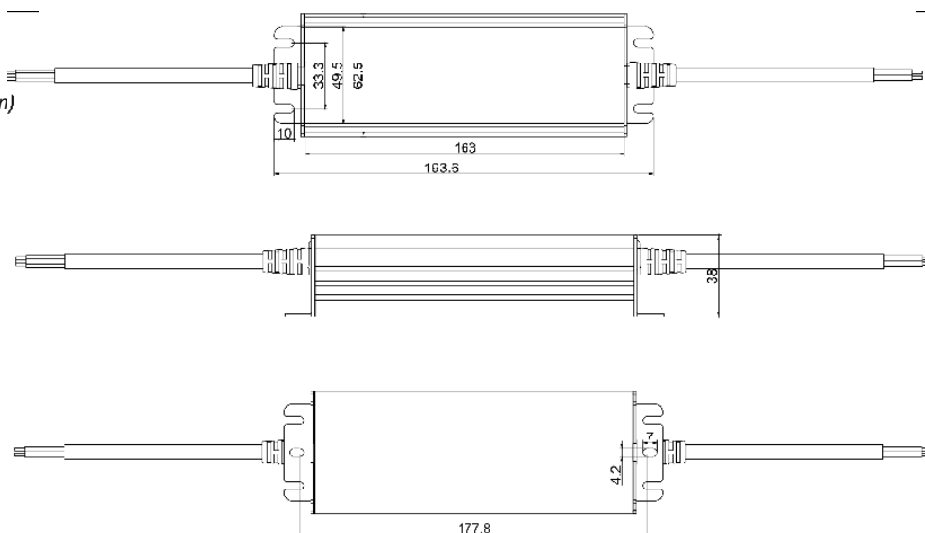


MCHQ150V-GE series

150W Constant Voltage LED Switching Power Supply




CHARACTERISTICS


DERATING CURVE

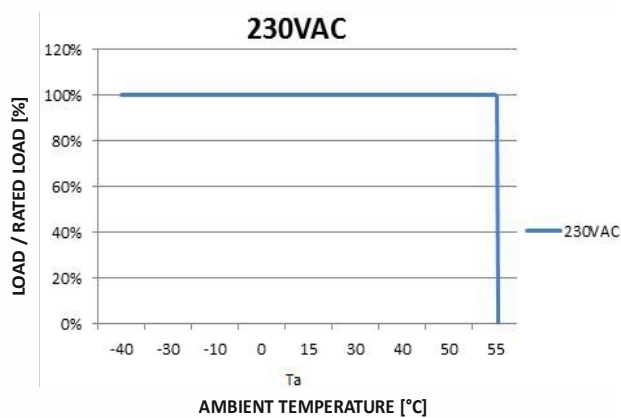


STATIC CHARACTERISTICS

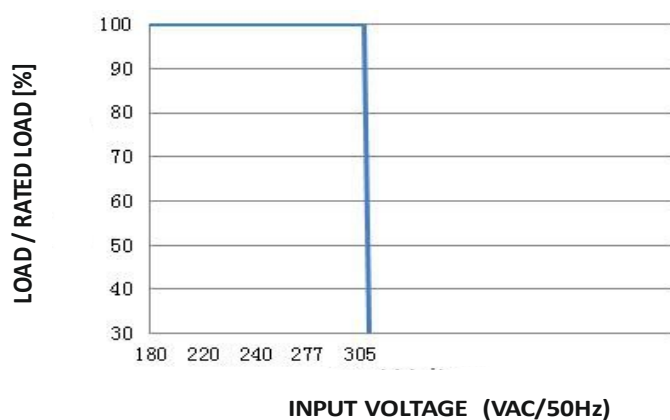


I-V CURVE

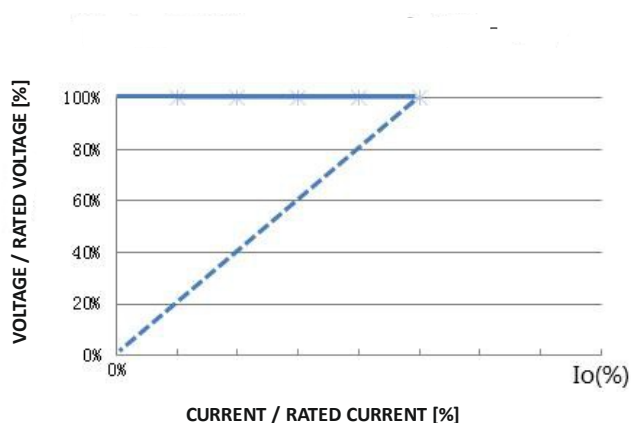


PF CURVE

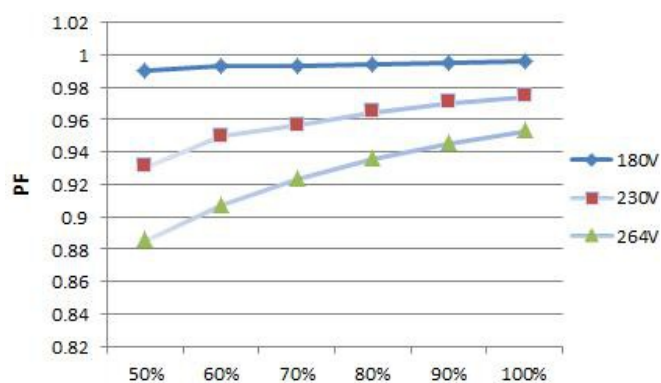

THD Curve

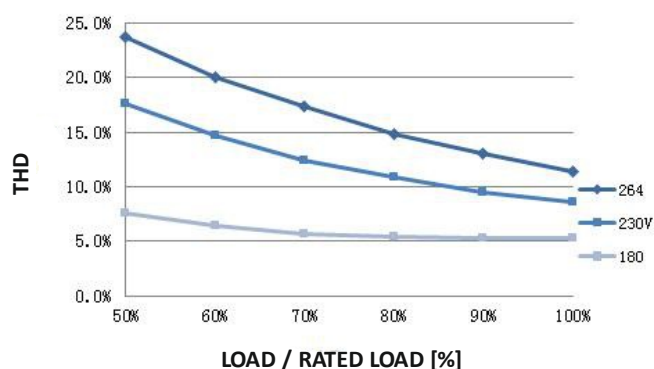

EFFICIENCY CURVE

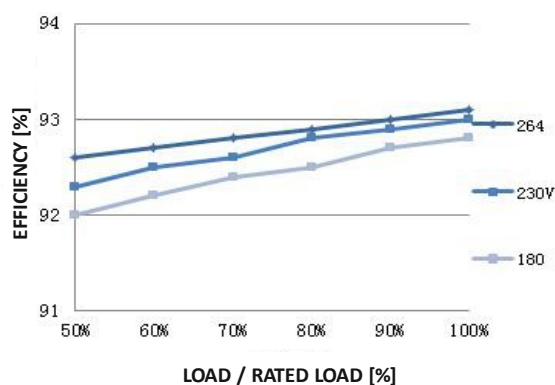

DEKLARACJA ZGODNOŚCI UE

/EU DECLARATION OF CONFORMITY

Deklarujemy zgodność produktu: */For the following equipment:*

Oznaczenie: <i>/Part No.:</i>	MCHQ150VX-GE (X=12, 24)
Numer partii: <i>/Batch No.</i>	S21xxxxxxxxx

z wymaganiami następujących przepisów oraz norm Unii Europejskiej: */is herewith confirmed to comply with the requirements set out in the Council Directive, the following standards were applied:*

Dyrektywy ROHS 2011/65/UE, 2015/863/UE, 2017/2102/UE
/ROHS Directives 2011/65/EU, 2015/863/EU, 2017/2102/EU

Zastosowana norma <i>/Standard</i>	Opis <i>/Description</i>
EN 62321-3-1:2014	Oznaczanie wybranych substancji w wyrobach elektrotechnicznych -- Część 3-1: Badanie przesiewowe -- Oznaczanie ołowiu, rtęci, kadmu, całkowitej zawartości chromu oraz całkowitej zawartości bromu metodą fluorescencyjnej spektrometrii rentgenowskiej <i>/Determination of certain substances in electrotechnical products. Screening. Lead, mercury, cadmium, total chromium and total bromine by X-ray fluorescence spectrometry</i>

Dyrektywa LVD 2014/35/UE
/Low Voltage Directive 2014/35/EU

Zastosowana norma <i>/Standard</i>	Opis <i>/Description</i>
EN 62493:2015	Ocena sprzętu oświetleniowego związana z ekspozycją człowieka na działanie pól elektromagnetycznych <i>/Assessment of lighting equipment related to human exposure to electromagnetic field</i>
EN 61347-1:2015 + A1:2021	Urządzenia do lamp -- Część 1: Wymagania ogólne i bezpieczeństwa <i>/Lamp controlgear - General and safety requirements.</i>
EN 61347-2-13:2014 + A1:2017	Urządzenia do lamp -- Część 2-13: Wymagania szczegółowe dotyczące elektronicznych urządzeń sterujących zasilanych prądem stałym lub prądem przemiennym do modułów LED <i>/Lamp controlgear - Particular requirements for d.c. or a.c. supplied electronic controlgear for LED modules</i>

Dyrektywa EMC 2014/30/UE
/Electromagnetic Compatibility Directive 2014/30/EU

Zastosowana norma <i>/Standard</i>	Opis <i>/Description</i>
EN55015:2019 + A1:2020	Poziomy dopuszczalne i metody pomiaru zaburzeń radioelektrycznych wytwarzanych przez elektryczne urządzenia oświetleniowe i urządzenia podobne <i>/Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment</i>
EN61000-3-2:2019 + A1:2021	Kompatybilność elektromagnetyczna (EMC) -- Część 3-2: Poziomy dopuszczalne -- Poziomy dopuszczalne emisji harmonicznych prądu (fazowy prąd zasilający odbiornika ≤ 16 A) <i>/Electromagnetic compatibility (EMC). Limits. Limits for harmonic current emissions (equipment input current ≤ 16 A per phase)</i>
EN61000-3-3:2013 + A1:2019	Kompatybilność elektromagnetyczna (EMC) -- Część 3-3: Poziomy dopuszczalne -- Ograniczanie zmian napięcia, wahań napięcia i migotania światła w publicznych sieciach zasilających niskiego napięcia, powodowanych przez odbiorniki o fazowym prądzie znamionowym < 16 A przyłączone bezwarunkowo <i>/Electromagnetic compatibility (EMC). Limits. Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection</i>
EN61547:2009	Sprzęt do ogólnych celów oświetleniowych -- Wymagania dotyczące kompatybilności elektromagnetycznej <i>/Equipment for general lighting purposes. EMC immunity requirements</i>

Niniejsza deklaracja zgodności wydana zostaje na wyłączną odpowiedzialność producenta.
/This declaration of conformity is issued under the sole responsibility of the manufacturer.

Zabrze, 04.12.2021r.

MPL Power Elektro Sp z o.o.
ul. Handlowa 13, 41-807 Zabrze
NIP 6312457646, REGON 240105606

Pieczęć firmy */Company stamp*

KIEROWNIK
Działu Technicznego

Lukasz Jaromin

Podpis i pieczęć osoby */Person signature and stamp*