

Specifications

• — •



288LEDs/m DC24V 12mm(FPC) SMD2835 CCT LED Strips
Ultra-Density & Tunable by One Loop


288LEDs/m DC24V 12mm(FPC) SMD2835 CCT LED Strips



- 1. Strong pure copper LED frame, and diameter>1mm, 99.9%-purity gold wire encapsulation, can reduce damage to the LED in different applications.
- 2.High density on PCB, no lighting spot.
- 3.Only one loop CCT tunnable LED strip is outfitted with extremely bright LED chips and strong adhesive backing. Special heat resistant PCB layout, copper layer 3Oz that make sure lower voltage drop and excellent heat dissipation.
- 4.3 SDCM one BIN only, these strips are great for providing elegant and discreet lighting.
- 5.The flexible design of LED strips allows for bright lighting almost any space you can imagine,which is quite suitable for back lighting and general lighting in aluminum frames or under cabinet, and is commonly used by architects and lighting designers in professional installations.

Dimensions

- Length:** 5M(16.4')/roll
- Cutting unit:** 16LEDs/55.55mm(2.187")
- LED spacing:** 3.4mm(0.133")
- LED height:** 0.9mm(0.035")
- Min. bend diameter:** Φ60mm(2.362")
- Mounting:** 3M tape
- IP Rate:** IP20/IP54/IP65/IP66/IP67/IP68

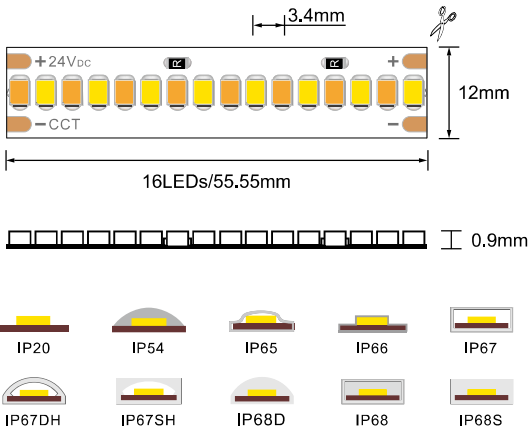

Product Parameters

LEDs Q'ty/m	288	Input Voltage:	DC24V	Lifetime:	50000h
		Input Current:	0.75A/1m&3.18A/5m	On-off times:	10000 (test times)
SMD Type	2835	Standard Power:	18W/m	Standard Package:	5M/roll
		Power option :	9 / 13 / 17.28 / 21.6W	Operating humidity:	40%-70%RH
		Dimension:	5000*12*0.9mm	Operating temperature:	Ta: -25~40°C,Tc:75°C(max)

Photo-electric Parameters

Data is subject to actual measurement based on SMD 2835 LED CRI>95

Power	Colour	CCT	Lumen/M	Lumen/W	Energy Efficiency Class
18W/m	Warm White	2700K	2057	117	E
	Pure White	6500K	2299	130	E
	Warm+Pure White	4000K	2158	123	E


1.CRI>80 & CRI>90 are available.

2. The tolerance of output data is ±10%.

3. The above data is based on IP20 ,one meter.

288LEDs/m DC24V 12mm(FPC) SMD2835 CCT LED Strips

Connect Drawing



Produktdatenblatt

DELEGIERTE VERORDNUNG (EU) 2019/2015 DER KOMMISSION zur
Energieverbrauchskennzeichnung von Lichtquellen

Name oder Handelsmarke des Lieferanten: Ledomec

Anschrift des Lieferanten: mec-light GmbH & Co. KG, Aachener Str. 420, D-41069 Mönchengladbach

Modellkennung: ML-2835-288-24

Art der Lichtquelle:

Verwendete Beleuchtungstechnologie:	LED	Ungebündelt oder gebündelt:	NDLS
Art des Sockels der Lichtquelle (oder andere elektrische Schnittstelle)	Type Y		
Netzspannung/Nicht direkt an die Netzspannung angeschlossen:	NMLS	Vernetzte Lichtquelle (CLS):	Nein
Farblich abstimmbare Lichtquelle:	Nein	Hülle:	-
Lichtquelle mit hoher Leuchtdichte:	Nein		
Blendschutzschild:	Nein	Dimmbar:	Nein


Produktparameter

Parameter	Wert	Parameter	Wert
Allgemeine Produktparameter:			
Energieverbrauch im Ein-Zustand (kWh/1000 h), auf die nächstliegende ganze Zahl gerundet	23	Energieeffizienzklasse	F
Nutzlichtstrom (ϕ_{use}) mit Angabe, ob sich der Wert auf den Lichtstrom in einer Kugel (360°), in einem breiten Kegel (120°) oder in einem schmalen Kegel (90°) bezieht	2 600 in Kugel (360°)	ähnliche Farbtemperatur, gerundet auf die nächstliegenden 100 K, oder Spanne der einstellbaren ähnlichen Farbtemperaturen, gerundet auf die nächstliegenden 100 K	2200...6500
Leistungsaufnahme im Ein-Zustand (P_{on}) in W	23,0	Leistungsaufnahme im Bereitschaftszustand (P_{sb}) in W, auf die zweite Dezimalstelle gerundet	0,00
Leistungsaufnahme im vernetzten Bereitschaftsbetrieb (P_{net})	-	Farbwiedergabeindex, auf die nächstliegende gan-	82

für CLS in W, auf die zweite Dezimalstelle gerundet			ze Zahl gerundet, oder Spanne der einstellbaren CRI-Werte	
äußere Abmessungen, ggf. ohne separates Betriebsgerät, Beleuchtungssteuerungsteile und Nicht-Beleuchtungsteile (Millimeter)	Höhe	1 000	Spektrale Strahlungsverteilung im Bereich 250 nm bis 800 nm bei Volllast	Siehe Bild auf letzter Seite
	Breite	12		
	Tiefe	3		
Angabe zu einer gleichwertigen Leistungsaufnahme ^(a)		-	Falls ja, gleichwertige Leistungsaufnahme (W)	-
			Farbwertanteile (x und y)	0,383 0,381
Parameter für LED- und OLED-Lichtquellen:				
Wert des R9-Farbwiedergabeindex		6	Lebensdauerfaktor	1,00
Lichtstromerhalt		0,97		

(a) „-“: nicht zutreffend;

(b) „-“: nicht zutreffend;

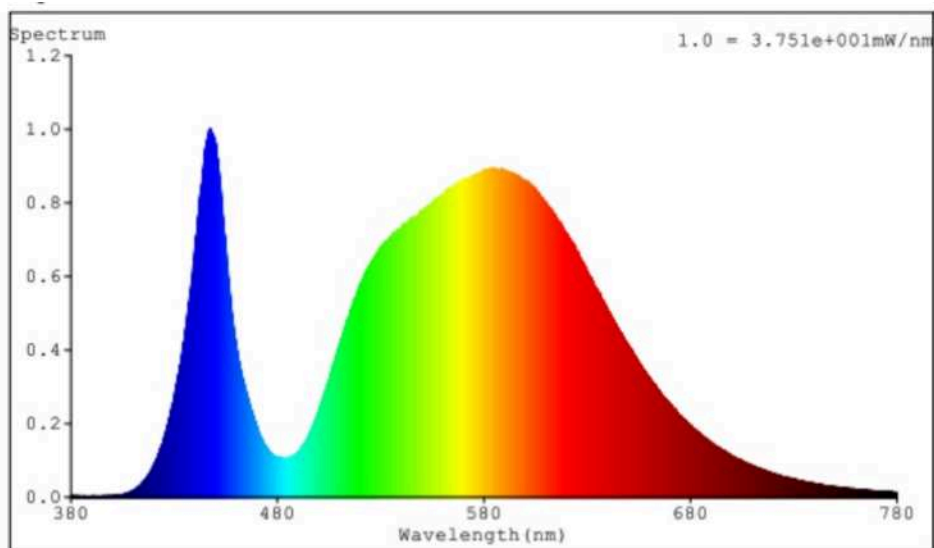



BST A RELIABLE TESTING FOR TRUST

GLOBAL TESTING AND CERTIFICATION PRECISION SERVICE CLOUD FACTORY

Certificate of Compliance

Certificate No. : XDX41230216102601EC

Applicant : **NEWSMART LED LIMITED**
1 building MingJinghai Industrial Park, Shiyan Town, Bao'an, Shenzhen, China

Manufacturer : **NEWSMART LED LIMITED**
1 building MingJinghai Industrial Park, Shiyan Town, Bao'an, Shenzhen, China

Product Name : **Flexible led Strip light**

Trademark : **NEWSMART**

Main Test Model : **NS-2835-120-24-1**
NS-COB-320-12/24, NS-COB-480-12/24, NS-COB-528-12/24, NS-COB-608-12/24,
NS-COB-810-12, NS-COB-840-24, NS-COB-1080-24, NS-COB-784-24, NS-COB-840-24-Z,
NS-COB-480-24-L, NS-COB-480-24-N, NS-COB-AA-12/24, NS-COB-ZZ-12/24,
NS-COB-480-12/24-M, NS-COB-378-24, NS-COB-576-24, NS-COB-528-12/24-F,
NS-COB-360-24, NS-COB-X-24, NS-COB-720-24-D, NS-COB-576-24, NS-COB-784-24-D,
NS-2835-288-24, NS-2835-400-24, NS-5050-288-24-A, NS-5050-288-24-B, NS-2835-252-24,
NS-5050-288-24-C, NS-2835-60-12/24, NS-2835-120-12/24, NS-2835-AA-12/24,
NS-2835-ZZ-12/24, NS-2835-240-12/24, NS-2835-168-12/24, NS-2835-192-12/24,
NS-5050-60-12/24, NS-5050-30-12/24, NS-5050-60-12/24-A, NS-5050-120-12/24-A,
NS-5050-60-12/24-B, NS-5050-120-12/24-B, NS-5050-60-12/24-C, NS-2835-128-24,
NS-2835-160-24-A, NS-2835-160-24-B, NS-2835-120-24-CC, NS-2835-130-48,
NS-3014-60-12/24, NS-3014-120-12/24, NS-2835-48-24, NS-5050-24-24, NS-2216-224-24,
NS-2835-60-12/24-S, NS-2835-126-12-WF, NS-2835-120-24-WF, NS-5050-60-24-A-DMX,
NS-5050-60-24-B-DMX, NS-5050-60-12/24-A-A, NS-2835-120-12/24-A-A,
NS-5050-60-12/24-A-B, NS-5050-60-12/24-B-C, NS-5050-60-5-A-C, NS-5050-60-5-B-C,
NS-5050-60-12-A-D, NS-5050-60-12-A-E, NS-5050-60-12-A-F, NS-2216-240-24,
NS-2216-300-24, NS-3528-60-12/24, NS-3528-120-12/24, NS-3528-240-12/24,
NS-5730-60-12/24, NS-5730-120-12/24

Additional Model :
NS-2835-160-24-A, NS-2835-160-24-B, NS-2835-120-24-CC, NS-2835-130-48,
NS-3014-60-12/24, NS-3014-120-12/24, NS-2835-48-24, NS-5050-24-24, NS-2216-224-24,
NS-2835-60-12/24-S, NS-2835-126-12-WF, NS-2835-120-24-WF, NS-5050-60-24-A-DMX,
NS-5050-60-24-B-DMX, NS-5050-60-12/24-A-A, NS-2835-120-12/24-A-A,
NS-5050-60-12/24-A-B, NS-5050-60-12/24-B-C, NS-5050-60-5-A-C, NS-5050-60-5-B-C,
NS-5050-60-12-A-D, NS-5050-60-12-A-E, NS-5050-60-12-A-F, NS-2216-240-24,
NS-2216-300-24, NS-3528-60-12/24, NS-3528-120-12/24, NS-3528-240-12/24,
NS-5730-60-12/24, NS-5730-120-12/24

Test Standard : **EN IEC 55015:2019+A11:2020, EN 61547:2009**
EN IEC 61000-3-2:2019/A1:2021, EN 61000-3-3:2013/A2:2021/AC:2022-01

As shown in the Test Report No. : **XDX41230216102601ER**

The EUT described above has been tested by us with the listed standards and found in compliance with the council EMC directive 2014/30/EU. It is possible to use CE marking to demonstrate the compliance with this EMC Directive.

The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production.



Christina Deng
Manager
Oct. 26, 2023

BST Testing(Shenzhen) Co., Ltd.

Add: No.7, New Era Industrial Zone, Guantian, Bao'an District, Shenzhen, Guangdong, China

Certificate Search: <http://www.bst-lab.com>, Tel: 400-882-6168, 8009990305, E-mail: christina@bst-lab.com



BST A RELIABLE TESTING FOR TRUST

GLOBAL TESTING AND CERTIFICATION PRECISION SERVICE CLOUD FACTORY

Certificate of Compliance

Certificate No. : BSTDGX41230216102601CC

Applicant : NEWSMART LED LIMITED

1 building MingJinghai Industrial Park, Shiyan Town, Bao'an, Shenzhen, China

Manufacturer : NEWSMART LED LIMITED

1 building MingJinghai Industrial Park, Shiyan Town, Bao'an, Shenzhen, China

Product Name : Flexible led Strip light

Trademark : NEWSMART

Main Test Model : NS-2835-120-24-1

NS-COB-320-12/24, NS-COB-480-12/24, NS-COB-528-12/24, NS-COB-608-12/24,
NS-COB-810-12, NS-COB-840-24, NS-COB-1080-24, NS-COB-784-24, NS-COB-840-24-Z,
NS-COB-480-24-L, NS-COB-480-24-N, NS-COB-AA-12/24, NS-COB-ZZ-12/24,
NS-COB-480-12/24-M, NS-COB-378-24, NS-COB-576-24, NS-COB-528-12/24-F,
NS-COB-360-24, NS-COB-X-24, NS-COB-720-24-D, NS-COB-576-24, NS-COB-784-24-D,
NS-2835-288-24, NS-2835-400-24, NS-5050-288-24-A, NS-5050-288-24-B, NS-2835-252-24,
NS-5050-288-24-C, NS-2835-60-12/24, NS-2835-120-12/24, NS-2835-AA-12/24,
NS-2835-ZZ-12/24, NS-2835-240-12/24, NS-2835-168-12/24, NS-2835-192-12/24,
NS-5050-60-12/24, NS-5050-30-12/24, NS-5050-60-12/24-A, NS-5050-120-12/24-A,
NS-5050-60-12/24-B, NS-5050-120-12/24-B, NS-5050-60-12/24-C, NS-2835-128-24,
NS-2835-160-24-A, NS-2835-160-24-B, NS-2835-120-24-CC, NS-2835-130-48,
NS-3014-60-12/24, NS-3014-120-12/24, NS-2835-48-24, NS-5050-24-24, NS-2216-224-24,
NS-2835-60-12/24-S, NS-2835-126-12-WF, NS-2835-120-24-WF, NS-5050-60-24-A-DMX,
NS-5050-60-24-B-DMX, NS-5050-60-12/24-A-A, NS-2835-120-12/24-A-A,
NS-5050-60-12/24-A-B, NS-5050-60-12/24-B-C, NS-5050-60-5-A-C, NS-5050-60-5-B-C,
NS-5050-60-12-A-D, NS-5050-60-12-A-E, NS-5050-60-12-A-F, NS-2216-240-24,
NS-2216-300-24, NS-3528-60-12/24, NS-3528-120-12/24, NS-3528-240-12/24,
NS-5730-60-12/24, NS-5730-120-12/24

Additional Model :

Test Standard : IEC 62321-4:2013+AMD1:2017, IEC 62321-5:2013,

IEC 62321-6:2015, IEC 62321-7-1:2015,

IEC 62321-7-2:2017, IEC 62321-8:2017

As shown in the Test Report No. : BSTDGX41230216102601CR

The EUT described above has been tested by us and found in compliance with the council RoHS 2 Directive 2011/65/EU Annex II (EU) 2015/863 as last amended by Directive (EU) 2017/2102. This certificate is only valid in conjunction with the test report.



RoHS



Christina Deng
Manager
Oct. 26, 2023

Dongguan BST Testing Co., Ltd

Add: 4/F., No.1, Chaomei Industrial Park, No.445, Donghai Road, Yantian District, Shenzhen, Guangdong, China

Certificate Search: <http://www.bst-lab.com>, Tel: 400-962-6168, 800-9990305, E-mail: christina@bst-lab.com